



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ :

A63C 9/08

A2

(11) International Publication Number:

WO 96/22137

(43) International Publication Date:

25 July 1996 (25.07.96)

(21) International Application Number: PCT/US96/01068

(22) International Filing Date: 16 January 1996 (16.01.96)

(30) Priority Data:

08/375,971

20 January 1995 (20.01.95)

US

(71) Applicant (for all designated States except US): THE BURTON CORPORATION [US/US]; 80 Industrial Parkway, Burlington, VT 05401 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): DODGE, David, J. [US/US]; R.R. 1, Box 1201, Shelburne, VT 05482 (US).

(74) Agent: HONEYMAN, Jason, M.; Wolf, Greenfield & Sacks, P.C., 600 Atlantic Avenue, Boston, MA 02210 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AZ, BY, KG, KZ, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).


Published

Without international search report and to be republished upon receipt of that report.

(54) Title: SNOWBOARD BOOT BINDING MECHANISM

(57) Abstract

A snowboard boot binding mechanism includes a base member having a recessed channel. The first plate is slidably attached to the base member. A first pair of engagement rods are fixedly attached to the first plate. Each of the first pair of engagement rods has a head disposed at an axial end of the rod for selectively engaging and locking a first bar attached to a first side of the snowboard boot. A second plate is fixedly attached to the base member. A second pair of engagement rods are fixedly attached to the second plate. Each of the second pair of engagement rods have a head disposed at an axial end of the rod for engaging and locking a second bar attached to a second side of the snowboard boot which is disposed opposite of the first side.

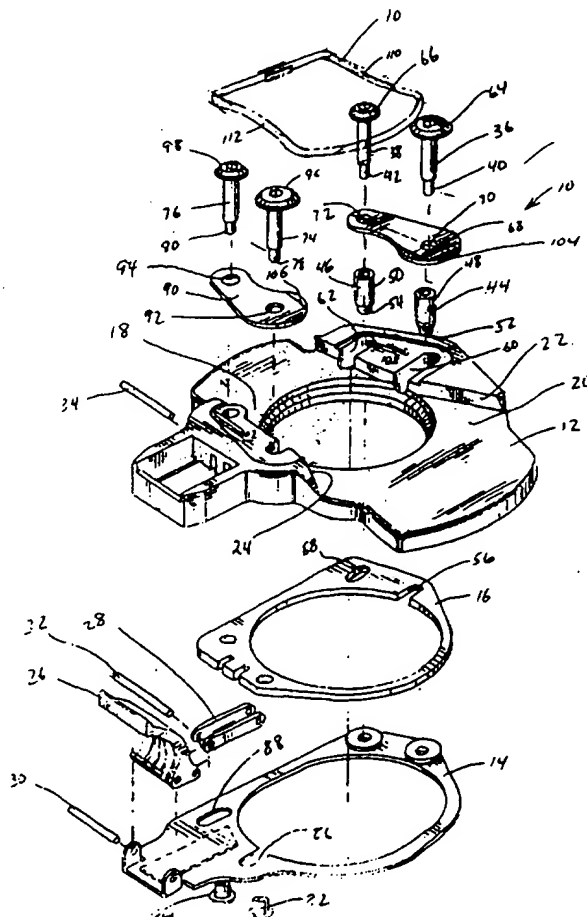

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

SNOWBOARD BOOT BINDING MECHANISM

Background of the Invention

Field of the Invention

5 The present invention relates generally to boot binding mechanisms. More specifically, the present invention relates to a snowboard boot binding mechanism that has a pair of engagement rods fixedly attached to a fixed plate and a second pair of engagement rods fixedly attached to a slidably movable plate to selectively engage and lock a snowboard boot in the boot
10 binding mechanism.

Description of the Related Art

 A recently popular sport, snowboarding presents operating conditions and physical demands to boot bindings that are somewhat dissimilar to other skiing-type sports. That is
15 because in snowboarding, the operator stands with both feet on the snowboard such that both feet are typically disposed at an angle with respect to the longitudinal direction of the ski. Given the sophisticated structure of presently manufactured boots for ski-type sports and the operating conditions the boots are subject to, a reliable and tight connection in between the boot and the snowboard is required.

20 An attempted solution to this problem is disclosed in U.S. Patent No. 4,973,073 to Raines et al., issued on November 27, 1990. The boot sole 40 of Raines is modified to have a binding ridge 42, 50 placed on each side of the boot. Ridge 42 is received in a fixed entrapment member 60 and ridge 50 is received by a pivoting entrapment member 70. To release a bound boot 18, the user simply pushes the handle 102 away from the boot until the hooking lip 76 is in an open
25 position and the second binding bridge 50 can be lifted out of the second socket 72. Accordingly, during use the snowboard binding can be rather easily inadvertently opened if handle 102 or any part of member 70 is accidentally pushed away from the boot.

 U.S. Patent No. 4,063,752 to Whittaker issued on December 20, 1977 discloses a ski binding that includes two opposing latch members 28 that each move towards and away from
30 each other to control the latch operation. An engagement plate 32 is secured to the bottom of the boot by screws and has latch receiving formations 34 disposed at its marginal edges.

 Notwithstanding the foregoing boot binding mechanisms, there are still major problems involved. The binding mechanisms are typically mounted on the ski or snowboard and are disposed in such a manner that outside forces can easily cause an accidental release of the

-2-

binding mechanism. Accordingly, it is an object of the present invention to provide a snowboard boot binding mechanism that permits selective engagement and locking of the snowboard boot while simultaneously preventing an inadvertent release of the boot from the locked position. It is a further object of the present invention to provide a boot binding mechanism that includes a
5 base member which acts as a housing to enclose most of the moving parts of the boot binding mechanism to thereby minimize the risk of an accidental release of the binding from the locked position. It is a further object to provide a boot binding mechanism that permits the binding mechanism to clamp the boot sole from the side, i.e., from the in-step area of the foot. It is a further object to provide a snowboard boot binding mechanism that requires less parts and thus,
10 is smaller and easier to manufacture. It is still a further object of the present invention that the snowboard boot binding mechanism be simple and cost effective to manufacture, yet reliable and efficient in use.

Summary of the Invention

15 In accordance with a preferred embodiment demonstrating further objects, features and advantages of the invention, a snowboard boot binding mechanism includes a base member having a recessed channel. A first plate is slidably attached to the base member. A first pair of engagement rods are fixedly attached to the first plate. Each of the first pair of engagement rods have a head disposed at an axial end of the rod for selectively engaging and locking a first bar
20 attached to a first side of the snowboard boot. A second plate is fixedly attached to the base member. A second pair of engagement rods are fixedly attached to the second plate. Each of the second pair of engagement rods having a head disposed at an axial end of the rod for engaging and locking a second bar attached to a second side of the snowboard boot which is disposed opposite to the first side.

25

Brief Description of the Drawings

The above and still further objects, features and advantages of the present invention will become apparent upon consideration of the following detailed description of a specific embodiment thereof, especially when taken in conjunction with the accompanying drawings
30 wherein like reference numerals in the various figures are utilized to designate like components, and wherein:

-3-

Figure 1 is an exploded view of the boot binding mechanism according to the present invention;

Figure 2 is a partial sectional top view of a snowboard boot engaged in the boot binding mechanism and in the unlocked position;

5 Figure 3 is a sectional view taken along lines 3-3 of Figure 2 and looking the direction of the arrows; and

Figure 4 is a sectional view similar to Figure 3 except that the boot binding mechanism is in the locked position.

10 Detailed Description of the Presently Preferred Embodiments

Referring now to Figure 1, a snowboard boot binding mechanism 10 is illustrated. The boot binding mechanism includes a base member 12, a first plate 14 and a second plate 16. The base member 12 has a recessed channel 18 that includes an upper surface 20 and two sidewalls surfaces 22, 24 to receive a snowboard boot.

15 The first plate 14 is slidably attached to base member 12 through a pivoting handle member 26 and pivoting link arm member 28. A pin 30 is used to pivotally connect handle member 26 to first plate 14. A second pin 32 is used to pivotally connect handle member 26 to link 28. The opposite end of link 28 is pivotally connected to base member 12 by pin 34.

A first pair of engagement rods 36, 38 are fixedly attached to first plate 14. The rods 36, 38 are integrally connected to first plate 14 at their lower axially ends 40, 42, respectively; it being understood that relative orientation adjectives such as "upper", "lower", etc. are utilized herein to simplify the present description and are not intended to limit the orientation of the binding mechanism when mounted for use. The rods 36, 38 are preferably connected to plate 14 by riveting. However, any other suitable mean fixedly attaching the rods to the plate may be used. Each rod 36, 38 passes through a spacer sleeve 44, 46, respectively. Each spacer sleeve 44, 46 has a stepped outer diameter portion including a larger diameter position, 48, 50 and a smaller diameter portion 52, 54, respectively. The smaller diameter portions 52, 54 are received in elongated slots 56, 58, respectively in second plate 16, whereas the larger diameter portions 44, 46 are received in elongated slots 60, 62, respectively, in the base member 12. The upper axially ends of the rods 36, 38 have a head or plate-shaped portion 64, 66. An engagement plate 68 has a pair of throughholes 70, 72 to receive the larger diameter portions of rods 36, 38. Thus, engagement plate 68 is disposed about engagement rods 36, 38 and between head portions 64, 66

and spacer sleeves 44, 46. The spacer sleeves are utilized to help absorb some of the bending forces that may be applied against rods 36, 38. Additionally, engagement plate 68 is used to help transfer some of the bending forces that may be applied to rods 36, 38 into tensile forces. Of course, axial forces in rods 36, 38 are preferred over bending forces.

5 A second pair of engagement rods 74, 76 are fixedly attached to second plate 16 in a similar manner in which the first pair of engagement rods 36, 38 are fixedly attached to the first plate 14. The pairs of engagement rods are preferably fixedly attached to the plates by a press fit. However, any suitable manner of fixedly attaching these two members together such as welding, shrink-fitting, etc. may be used. The lower ends 78, 80, respectively of the second pair of
10 engagement rods 74, 76 have a reduced diameter portion which are sized to fit within a pair of shoulder bushings 82, 84. The shoulder bushings 82, 84 help guide a sliding motion of the first plate 14 because they are received in elongated slots 86, 88, respectively. A second engagement plate is mounted about the second pair of engagements rods 74, 76 via their respective throughholes 92, 94. Engagement plate 90 is mounted just below the heads 96, 98 of the
15 engagement rods 74, 76, respectively. Engagement plate 68 is slidably supported on a slightly recessed, substantially planer surface 100 in base member 12. Likewise, engagement plate 90 is slidably supported on a slightly recessed, substantially planer support surface 102. Plates 68, 90, also have bevelled edge portions 104, 106 to permit a bar member 108, which is in the form of a closed loop and is embedded in a sole of snowboard boot, to more easily engage into a position
20 below plate 68, 90. Bar member 108 has at least two exposed side portions 110, 112, which correspond to the in-step area of the user's foot. Bar member 108 may alternatively not be embedded in the sole, but may be connected to the sole of the snowboard boot, with or without a reinforcing plate depending on the stresses that will be applied to the bar. Side portions 110, 112 are exposed at least along their upper surface, as illustrated in Figures 3 and 4 so that the upper
25 portion of the side 110 can be selectively engaged with the first pair of engagement rods 36 and 38 such that the head portions 64, 66 and the engagement plate 68 lock the boot in the binding mechanism as illustrated in Figure 5. The opposite side 112 of the bar member 108 is exposed along its upper surface to permit head portions 96, 98 of the second pair of engagement rods 74, 76 and engagement plate 90 to engage and to lock the snowboard boot in the binding mechanism
30 when the first plate is in the locked position as illustrated in Figure 4.

The operation of the boot binding mechanism will be described below with reference to Figures 2-4. A user wearing a snowboard boot 120 having a closed loop bar member 108

embedded in its sole steps within the open binding mechanism and positions the second side 112 of the bar member 108 into the engaged position below heads 96, 98 and below engagement plate 90 as illustrated in Figures 2 and 3.

To lock the boot within the binding mechanism the user then pulls upwardly on handle member 26 in the direction indicated by arrow A in Figure 4. This upper movement of handle member 26 causes handle member 26 to rotate in the direction indicated by arrow A and to translate in a direction indicated by arrow C in Figure 4. At the same time, link member 28 pivots about fixed pin 34 in the direction indicated by arrow B, which is opposite to the direction of arrow A. Additionally, simultaneously with the pivoting movements, first plate 14 is slidably moved in the direction indicated by arrow C from the open position as illustrated in Figure 3 to the closed position as illustrated in Figure 4. As can be seen in Figures 3 and 4, as handle member 26 is pivoted in the upward position, pivot pin 30 slides in the direction indicated by arrow C. When pin 32 passes over an imaginary line extending between pins 30, 34, the handle reaches what is known as a centered position. In this centered position the handle is instable and the handle will then tend to snap into the closed position as illustrated in Figure 4. In the closed position, the handle is in what is known as an over-centered position. The first set of engagement rods 36, 38 are moved from the open position as illustrated in Figure 3 to the closed position as illustrated in Figure 4, such that the heads 64, 66 and the engagement plate 68 selectively engage and lock the first side 110 of the bar member 108 in the boot binding mechanism. If desired, a conventional latch (not shown) may be placed onto handle member 26 to further prevent an inadvertent pivoting of the handle member. However, in most cases the pressure applied from the boot and the base member will be sufficient to maintain the handle in the stable, over-centered position illustrated in Figure 4.

To unlock the boot, the user simply pushes down and rotates handle member 26 in the direction indicated by arrow B in Figures 3. Because of the linkage mechanism, this movement will cause handle member 26 to rotate in the direction indicated by arrow B and to translate in the direction indicated by arrow D. Thus, because of the link between the first plate 14 and the handle member 26, the second plate 14 is slidably moved in the direction indicated by arrow D to the open position as illustrated in Figure 3. The user can now simply step out of the boot binding mechanism.

Having described the presently preferred exemplary embodiment of a new and improved snowboard boot binding mechanism, in accordance with the present invention, it is believed that

-6-

other modifications, variations and changes will be suggested to those skilled in the art in view of the teachings set forth below. It is, therefore, to be understood that all such variations, modifications, and changes are believed to fall within the scope of the present invention as defined by the appended claims.

CLAIMS

1. An apparatus including a snowboard boot binding, comprising:

a base adapted to receive a snowboard boot;

5 a first engagement member movably mounted to the base, the first engagement member being adapted to engage a first side of the snowboard boot when the binding is in a closed configuration;

a second engagement member mounted to the base, the second engagement member being adapted to engage a second side of the snowboard boot opposite the first side when the binding is in the closed configuration; and

10 a handle mechanically coupled to the first engagement member so that actuation of the handle in a first direction moves the first engagement member toward the second engagement member to move the binding into the closed configuration, the binding being constructed and arranged so that compression forces generated by the snowboard boot on the binding tend to actuate the handle in the first direction.

15

2. The apparatus of claim 1, wherein the handle is mechanically coupled to the first engagement member so that actuation of the handle upwardly away from the base slides the first engagement member toward the second engagement member to place the binding into the closed configuration.

20

3. An apparatus including, in combination, a snowboard boot and binding, wherein the binding includes at least one engagement member adapted to engage the snowboard boot, and wherein the snowboard boot includes at least one recess adapted to receive the at least one engagement member.

25

4. An apparatus including a snowboard boot binding, comprising:

a base adapted to receive a snowboard boot;

30 a first engagement member movably mounted to the base, the first engagement member being adapted to engage a first side of the snowboard boot when the binding is in a closed configuration;

a second engagement member mounted to the base, the second engagement member being adapted to engage a second side of the snowboard boot opposite the first side when the

binding is in the closed configuration; and

a handle supported by the base and mechanically coupled to the first engagement member so that actuation of the handle upwardly away from the base moves the first engagement member toward the second engagement member to place the binding into the closed configuration.

5

5. The apparatus of any of claims 1-2 and 4, wherein the first engagement member is slidably mounted to the base, and wherein actuation of the handle upwardly slides the first engagement member toward the second engagement member.

10 6. The apparatus of any of claims 1-2 and 4-5, in combination with a snowboard boot that includes at least one recess adapted to receive the at least one engagement member.

7. The apparatus of any of claims 1-2 and 4-6, wherein the handle is pivotally connected to the first engagement member, and wherein the snowboard boot binding further includes a link
15 pivotally connected to the handle, the link being further pivotally connected to the base.

8. The apparatus of claim 7, wherein the binding has open and closed configurations, and wherein:

the handle is pivotally connected to the first plate at a first pivot point;
20 the link is pivotally connected to the handle at a second pivot point;
the link is pivotally connected to the base at a third pivot point;
the binding has a locking axis that passes through the second and third pivot points; and
the first pivot point is positioned above the locking axis when the binding is in the closed configuration.

25

9. The apparatus of any of claims 1-8, wherein each engagement member includes a pair of engagement surfaces including first and second spaced apart engagement surfaces adapted to separately engage first and second sections of the snowboard boot while not engaging a third section of the snowboard boot disposed therebetween.

30

10. The apparatus of any of claims 1-8, wherein at least one engagement member includes a pair of engagement surfaces including first and second spaced apart engagement surfaces adapted

to separately engage first and second sections of the snowboard boot while not engaging a third section of the snowboard boot disposed therebetween.

11. The apparatus of claim 3, wherein the at least one recess includes first and second
5 recesses separated by a non-recessed section of the snowboard boot, and wherein the at least one engagement member includes a pair of engagement surfaces including first and second spaced apart engagement surfaces adapted to separately engage the first and second recesses.

Fig. 2

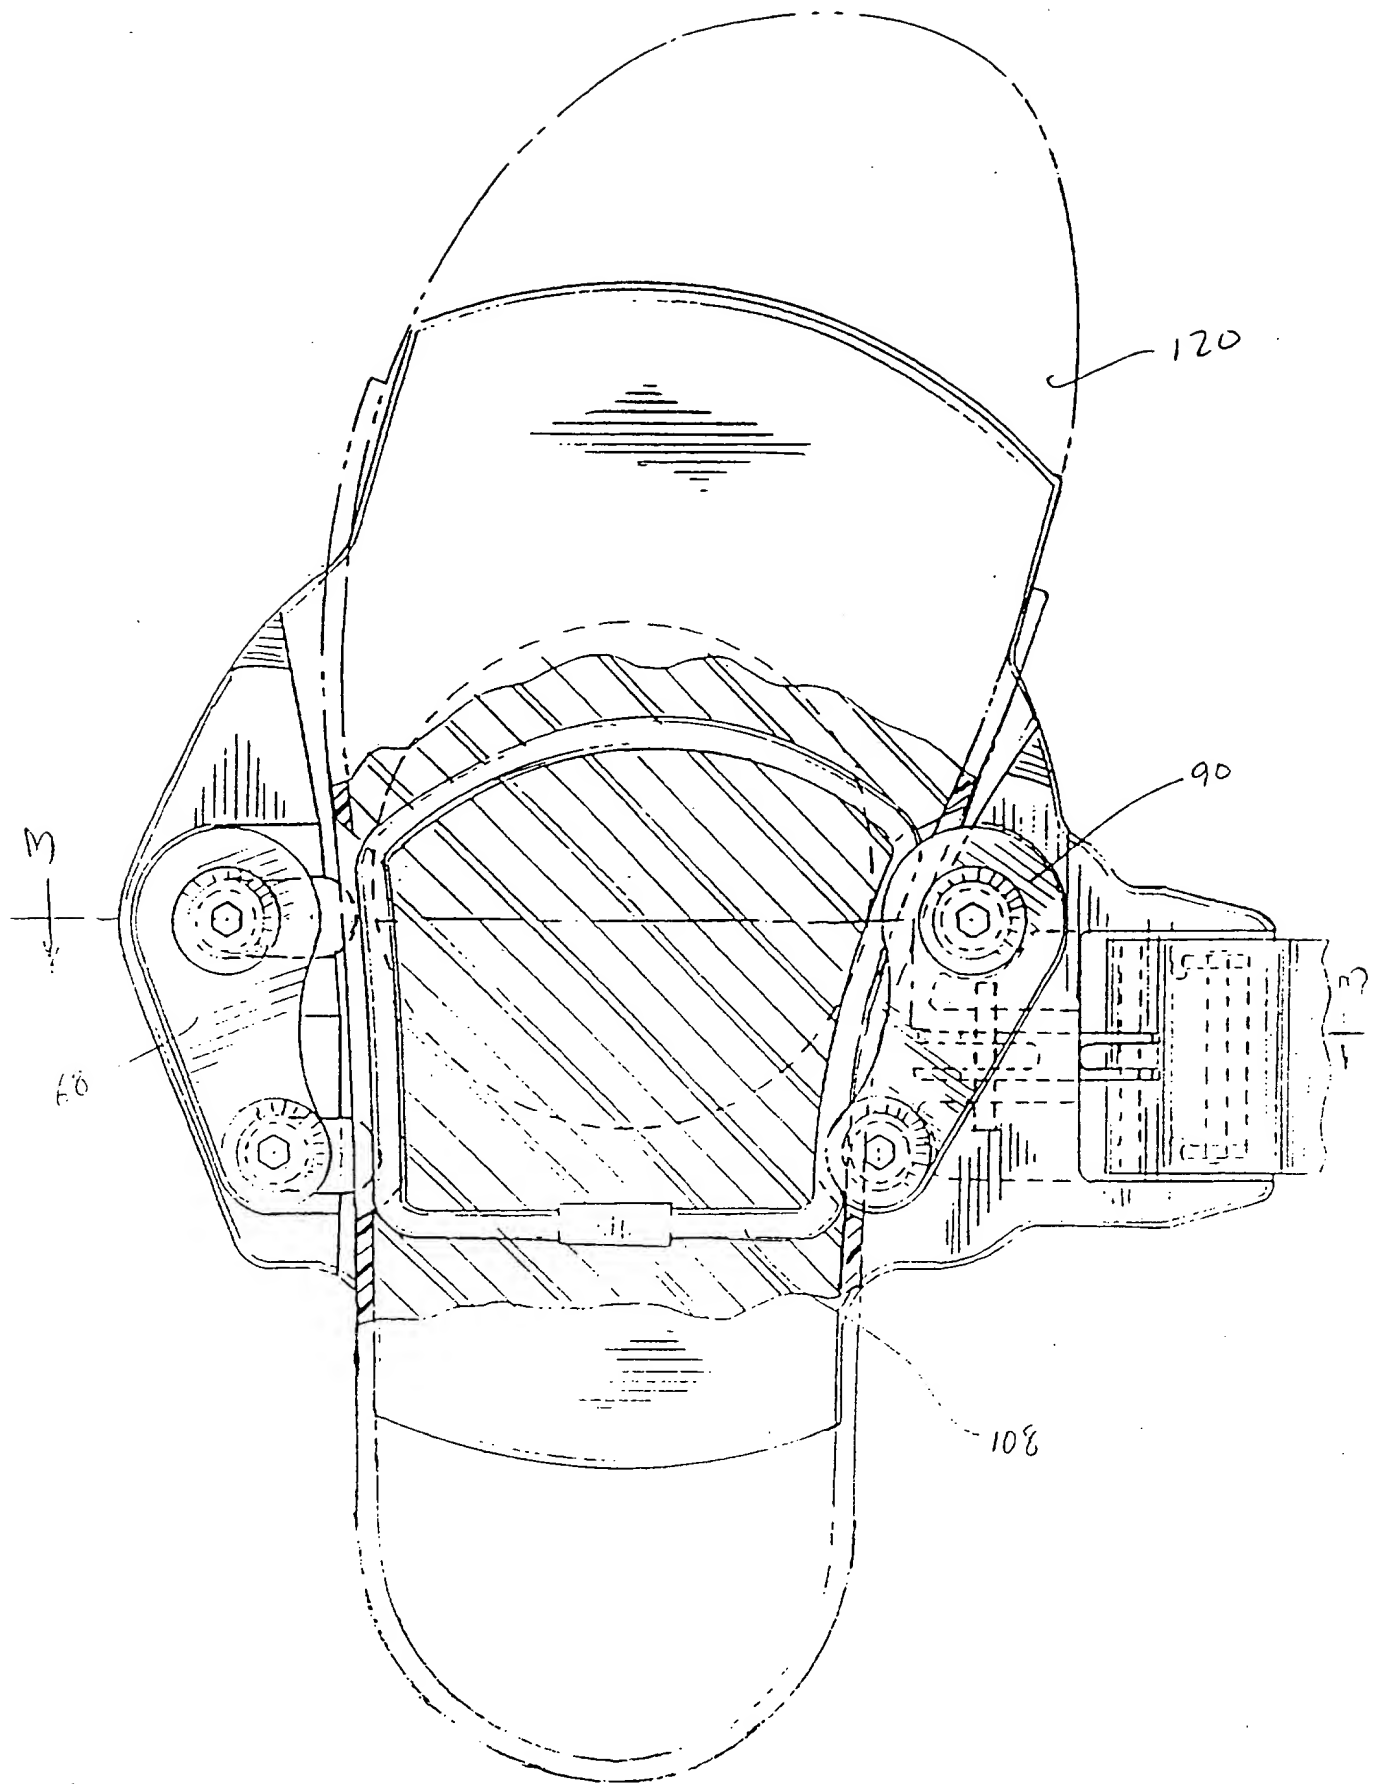


Fig. 3


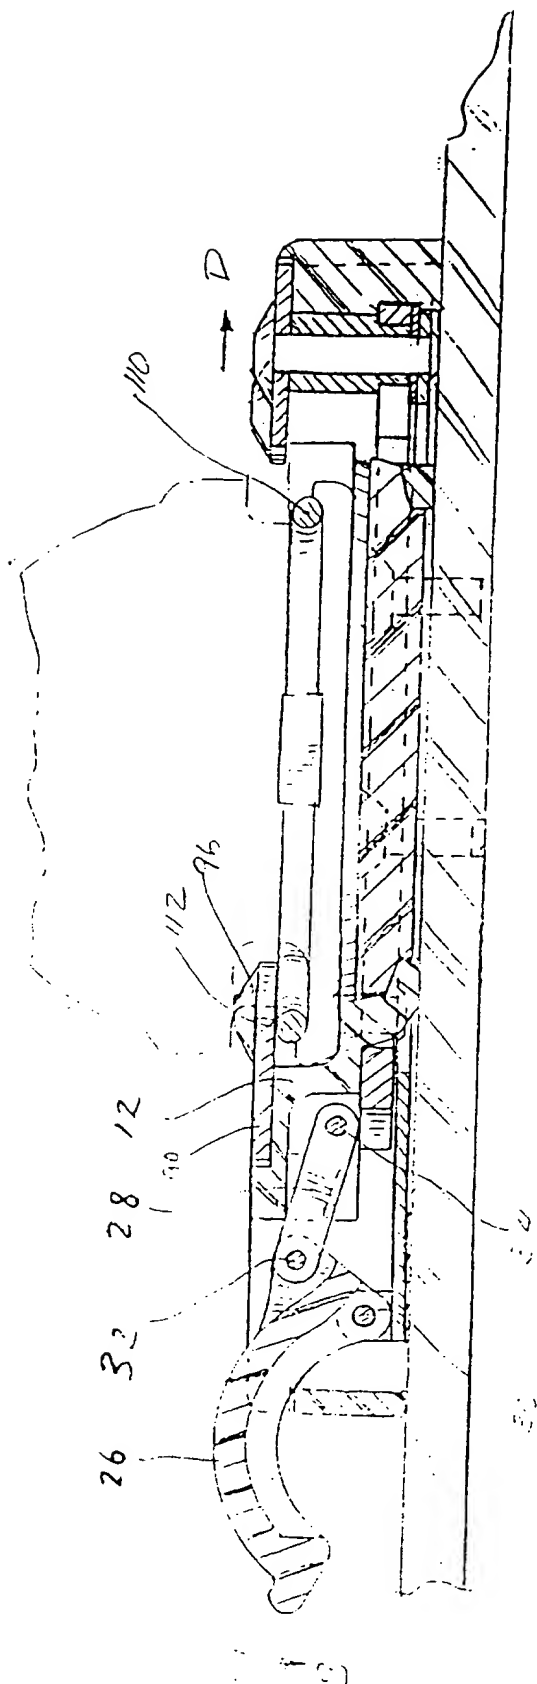


Fig. 4



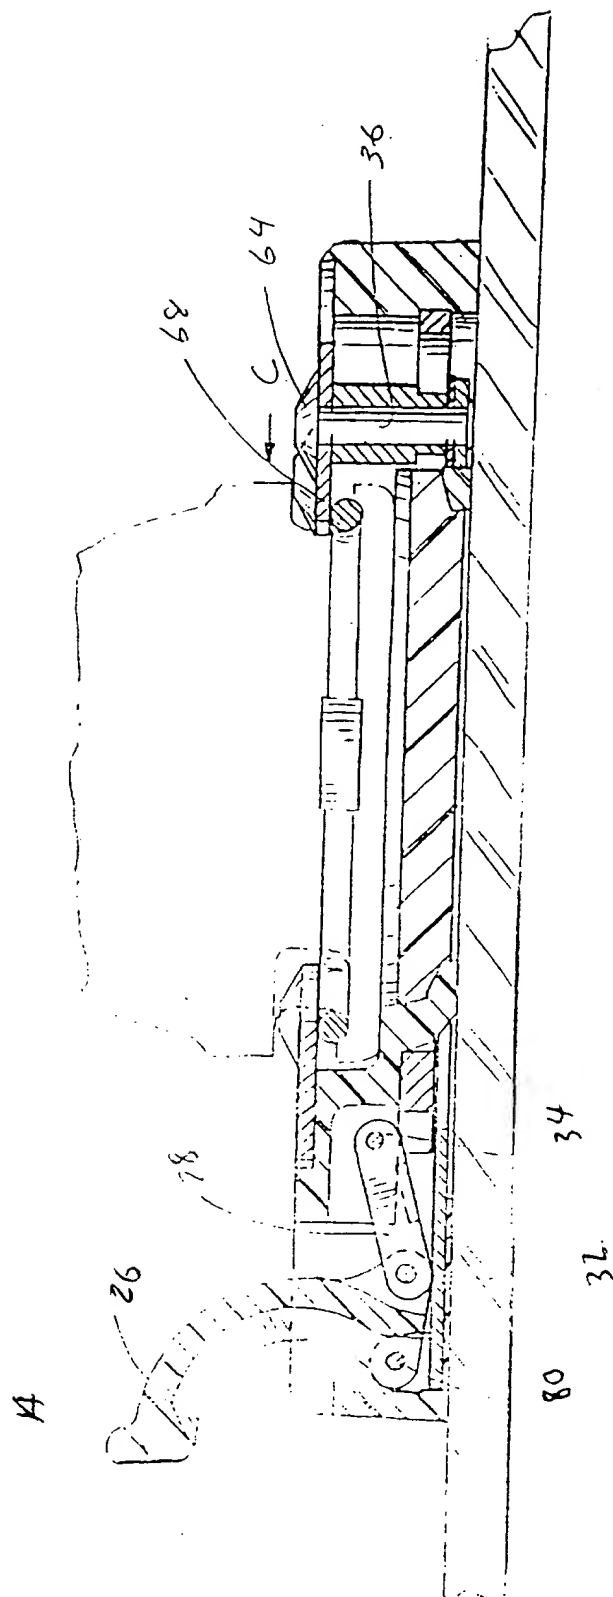


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A63C 9/08	A3	(11) International Publication Number: WO 96/22137	(43) International Publication Date: 25 July 1996 (25.07.96)
(21) International Application Number: PCT/US96/01068		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AZ, BY, KG, KZ, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 16 January 1996 (16.01.96)		Published With international search report.	
(30) Priority Data: 08/375,971 20 January 1995 (20.01.95) US		(88) Date of publication of the international search report: 3 October 1996 (03.10.96)	
(71) Applicant (for all designated States except US): THE BURTON CORPORATION [US/US]; 80 Industrial Parkway, Burlington, VT 05401 (US).			
(72) Inventor; and			
(75) Inventor/Applicant (for US only): DODGE, David, J. [US/US]; R.R. 1, Box 1201, Shelburne, VT 05482 (US).			
(74) Agent: HONEYMAN, Jason, M.; Wolf, Greenfield & Sacks, P.C., 600 Atlantic Avenue, Boston, MA 02210 (US).			

(54) Title: SNOWBOARD BOOT BINDING MECHANISM

(57) Abstract

A snowboard boot binding mechanism includes a base member having a recessed channel. The first plate is slidably attached to the base member. A first pair of engagement rods are fixedly attached to the first plate. Each of the first pair of engagement rods has a head disposed at an axial end of the rod for selectively engaging and locking a first bar attached to a first side of the snowboard boot. A second plate is fixedly attached to the base member. A second pair of engagement rods are fixedly attached to the second plate. Each of the second pair of engagement rods have a head disposed at an axial end of the rod for engaging and locking a second bar attached to a second side of the snowboard boot which is disposed opposite of the first side.

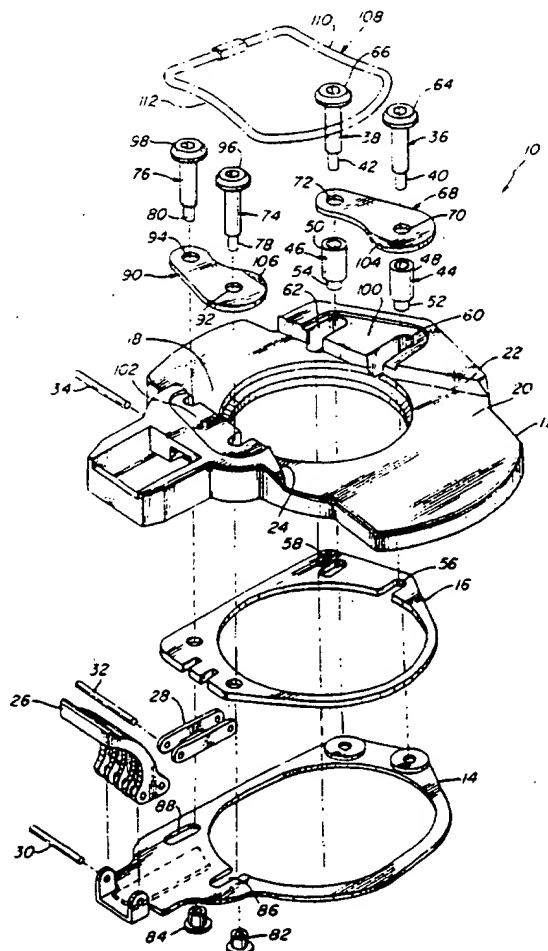

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 96/01068

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 A63C9/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A63C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US,A,5 299 823 (GLASER) 5 April 1994 see column 8, paragraph 7 - column 9, paragraph 1; figures 3-12 ---	1,4,5 2,3,6-11
X A	FR,A,2 148 501 (BETSCHART) 23 March 1973 see page 4, paragraph 1; figures 1-3,6 ---	1,4 2,3,5-8
A	DE,U,94 13 356 (TECHNO CIRCLE GMBH) 1 December 1994 see figures 2-4 -----	1,4

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *&* document member of the same patent family

Date of the actual completion of the international search

2 July 1996

Date of mailing of the international search report

17. 07. 96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+ 31-70) 340-3016

Authorized officer

Steegman, R

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 96/01068

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-5299823	05-04-94	AU-B- 6764894 WO-A- 9416784	15-08-94 04-08-94
FR-A-2148501	23-03-73	US-A- 3870327 CH-A- 542633 DE-A- 2225564 US-A- 3779570	11-03-75 30-11-73 22-02-73 18-12-73
DE-U-9413356	01-12-94	NONE	

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A63C 9/08	A3	(11) International Publication Number: WO 96/22137 (43) International Publication Date: 25 July 1996 (25.07.96)
--	----	--

(21) International Application Number: PCT/US96/01068

(22) International Filing Date: 16 January 1996 (16.01.96)

(30) Priority Data:
08/375,971 20 January 1995 (20.01.95) US

(71) Applicant (for all designated States except US): THE BURTON CORPORATION [US/US]; 80 Industrial Parkway, Burlington, VT 05401 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): DODGE, David, J. [US/US]; R.R. 1, Box 1201, Shelburne, VT 05482 (US).

(74) Agent: HONEYMAN, Jason, M.; Wolf, Greenfield & Sacks, P.C., 600 Atlantic Avenue, Boston, MA 02210 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AZ, BY, KG, KZ, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published


With international search report.

(88) Date of publication of the international search report:
3 October 1996 (03.10.96)

(54) Title: SNOWBOARD BOOT BINDING MECHANISM

(57) Abstract

A snowboard boot binding mechanism includes a base member having a recessed channel. The first plate is slidably attached to the base member. A first pair of engagement rods are fixedly attached to the first plate. Each of the first pair of engagement rods has a head disposed at an axial end of the rod for selectively engaging and locking a first bar attached to a first side of the snowboard boot. A second plate is fixedly attached to the base member. A second pair of engagement rods are fixedly attached to the second plate. Each of the second pair of engagement rods have a head disposed at an axial end of the rod for engaging and locking a second bar attached to a second side of the snowboard boot which is disposed opposite of the first side.

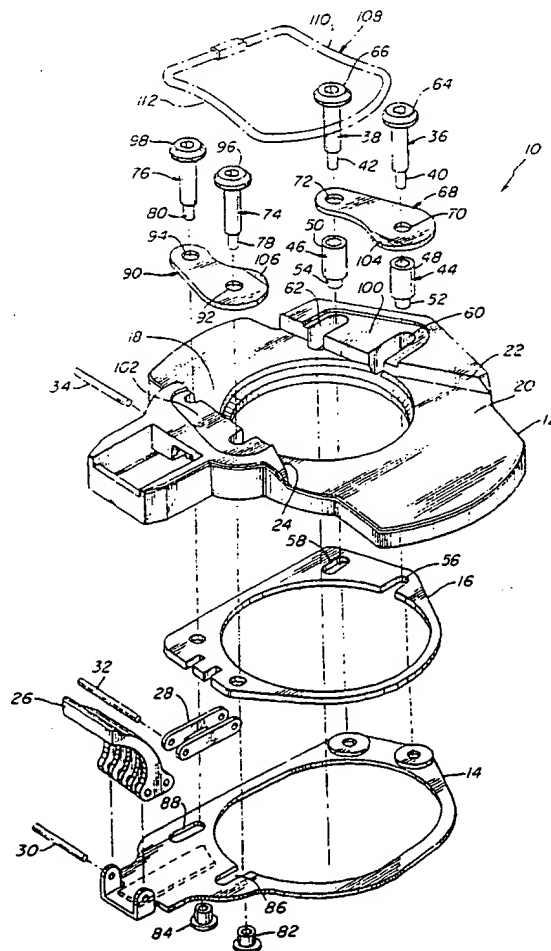

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Larvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viêt Nam

SNOWBOARD BOOT BINDING MECHANISM

Background of the Invention

Field of the Invention

5 The present invention relates generally to boot binding mechanisms. More specifically, the present invention relates to a snowboard boot binding mechanism that has a pair of engagement rods fixedly attached to a fixed plate and a second pair of engagement rods fixedly attached to a slidably movable plate to selectively engage and lock a snowboard boot in the boot
10 binding mechanism.

Description of the Related Art

A recently popular sport, snowboarding presents operating conditions and physical demands to boot bindings that are somewhat dissimilar to other skiing-type sports. That is
15 because in snowboarding, the operator stands with both feet on the snowboard such that both feet are typically disposed at an angle with respect to the longitudinal direction of the ski. Given the sophisticated structure of presently manufactured boots for ski-type sports and the operating conditions the boots are subject to, a reliable and tight connection in between the boot and the snowboard is required.

20 An attempted solution to this problem is disclosed in U.S. Patent No. 4,973,073 to Raines et al., issued on November 27, 1990. The boot sole 40 of Raines is modified to have a binding ridge 42, 50 placed on each side of the boot. Ridge 42 is received in a fixed entrapment member 60 and ridge 50 is received by a pivoting entrapment member 70. To release a bound boot 18, the user simply pushes the handle 102 away from the boot until the hooking lip 76 is in an open
25 position and the second binding bridge 50 can be lifted out of the second socket 72. Accordingly, during use the snowboard binding can be rather easily inadvertently opened if handle 102 or any part of member 70 is accidentally pushed away from the boot.

U.S. Patent No. 4,063,752 to Whittaker issued on December 20, 1977 discloses a ski binding that includes two opposing latch members 28 that each move towards and away from
30 each other to control the latch operation. An engagement plate 32 is secured to the bottom of the boot by screws and has latch receiving formations 34 disposed at its marginal edges.

Notwithstanding the foregoing boot binding mechanisms, there are still major problems involved. The binding mechanisms are typically mounted on the ski or snowboard and are disposed in such a manner that outside forces can easily cause an accidental release of the

binding mechanism. Accordingly, it is an object of the present invention to provide a snowboard boot binding mechanism that permits selective engagement and locking of the snowboard boot while simultaneously preventing an inadvertent release of the boot from the locked position. It is a further object of the present invention to provide a boot binding mechanism that includes a
5 base member which acts as a housing to enclose most of the moving parts of the boot binding mechanism to thereby minimize the risk of an accidental release of the binding from the locked position. It is a further object to provide a boot binding mechanism that permits the binding mechanism to clamp the boot sole from the side, i.e., from the in-step area of the foot. It is a further object to provide a snowboard boot binding mechanism that requires less parts and thus,
10 is smaller and easier to manufacture. It is still a further object of the present invention that the snowboard boot binding mechanism be simple and cost effective to manufacture, yet reliable and efficient in use.

Summary of the Invention

15 In accordance with a preferred embodiment demonstrating further objects, features and advantages of the invention, a snowboard boot binding mechanism includes a base member having a recessed channel. A first plate is slidably attached to the base member. A first pair of engagement rods are fixedly attached to the first plate. Each of the first pair of engagement rods have a head disposed at an axial end of the rod for selectively engaging and locking a first bar
20 attached to a first side of the snowboard boot. A second plate is fixedly attached to the base member. A second pair of engagement rods are fixedly attached to the second plate. Each of the second pair of engagement rods having a head disposed at an axial end of the rod for engaging and locking a second bar attached to a second side of the snowboard boot which is disposed opposite to the first side.

25

Brief Description of the Drawings

The above and still further objects, features and advantages of the present invention will become apparent upon consideration of the following detailed description of a specific embodiment thereof, especially when taken in conjunction with the accompanying drawings
30 wherein like reference numerals in the various figures are utilized to designate like components, and wherein:

Figure 1 is an exploded view of the boot binding mechanism according to the present invention;

Figure 2 is a partial sectional top view of a snowboard boot engaged in the boot binding mechanism and in the unlocked position;

5 Figure 3 is a sectional view taken along lines 3-3 of Figure 2 and looking the direction of the arrows; and

Figure 4 is a sectional view similar to Figure 3 except that the boot binding mechanism is in the locked position.

10 **Detailed Description of the Presently Preferred Embodiments**

Referring now to Figure 1, a snowboard boot binding mechanism 10 is illustrated. The boot binding mechanism includes a base member 12, a first plate 14 and a second plate 16. The base member 12 has a recessed channel 18 that includes an upper surface 20 and two sidewalls surfaces 22, 24 to receive a snowboard boot.

15 The first plate 14 is slidably attached to base member 12 through a pivoting handle member 26 and pivoting link arm member 28. A pin 30 is used to pivotally connect handle member 26 to first plate 14. A second pin 32 is used to pivotally connect handle member 26 to link 28. The opposite end of link 28 is pivotally connected to base member 12 by pin 34.

20 A first pair of engagement rods 36, 38 are fixedly attached to first plate 14. The rods 36, 38 are integrally connected to first plate 14 at their lower axially ends 40, 42, respectively; it being understood that relative orientation adjectives such as "upper", "lower", etc. are utilized herein to simplify the present description and are not intended to limit the orientation of the binding mechanism when mounted for use. The rods 36, 38 are preferably connected to plate 14 by riveting. However, any other suitable mean fixedly attaching the rods to the plate may be used. Each rod 36, 38 passes through a spacer sleeve 44, 46, respectively. Each spacer sleeve 44, 46 has a stepped outer diameter portion including a larger diameter position, 48, 50 and a smaller diameter portion 52, 54, respectively. The smaller diameter portions 52, 54 are received in elongated slots 56, 58, respectively in second plate 16, whereas the larger diameter portions 44, 46 are received in elongated slots 60, 62, respectively, in the base member 12. The upper 25 axially ends of the rods 36, 38 have a head or plate-shaped portion 64, 66. An engagement plate 68 has a pair of throughholes 70, 72 to receive the larger diameter portions of rods 36, 38. Thus, engagement plate 68 is disposed about engagement rods 36, 38 and between head portions 64, 66 30

and spacer sleeves 44, 46. The spacer sleeves are utilized to help absorb some of the bending forces that may be applied against rods 36, 38. Additionally, engagement plate 68 is used to help transfer some of the bending forces that may be applied to rods 36, 38 into tensile forces. Of course, axial forces in rods 36, 38 are preferred over bending forces.

5 A second pair of engagement rods 74, 76 are fixedly attached to second plate 16 in a similar manner in which the first pair of engagement rods 36, 38 are fixedly attached to the first plate 14. The pairs of engagement rods are preferably fixedly attached to the plates by a press fit. However, any suitable manner of fixedly attaching these two members together such as welding, shrink-fitting, etc. may be used. The lower ends 78, 80, respectively of the second pair of
10 engagement rods 74, 76 have a reduced diameter portion which are sized to fit within a pair of shoulder bushings 82, 84. The shoulder bushings 82, 84 help guide a sliding motion of the first plate 14 because they are received in elongated slots 86, 88, respectively. A second engagement plate is mounted about the second pair of engagements rods 74, 76 via their respective throughholes 92, 94. Engagement plate 90 is mounted just below the heads 96, 98 of the
15 engagement rods 74, 76, respectively. Engagement plate 68 is slidably supported on a slightly recessed, substantially planar surface 100 in base member 12. Likewise, engagement plate 90 is slidably supported on a slightly recessed, substantially planar support surface 102. Plates 68, 90, also have bevelled edge portions 104, 106 to permit a bar member 108, which is in the form of a closed loop and is embedded in a sole of snowboard boot, to more easily engage into a position
20 below plate 68, 90. Bar member 108 has at least two exposed side portions 110, 112, which correspond to the in-step area of the user's foot. Bar member 108 may alternatively not be embedded in the sole, but may be connected to the sole of the snowboard boot, with or without a reinforcing plate depending on the stresses that will be applied to the bar. Side portions 110, 112 are exposed at least along their upper surface, as illustrated in Figures 3 and 4 so that the upper
25 portion of the side 110 can be selectively engaged with the first pair of engagement rods 36 and 38 such that the head portions 64, 66 and the engagement plate 68 lock the boot in the binding mechanism as illustrated in Figure 5. The opposite side 112 of the bar member 108 is exposed along its upper surface to permit head portions 96, 98 of the second pair of engagement rods 74, 76 and engagement plate 90 to engage and to lock the snowboard boot in the binding mechanism
30 when the first plate is in the locked position as illustrated in Figure 4.

The operation of the boot binding mechanism will be described below with reference to Figures 2-4. A user wearing a snowboard boot 120 having a closed loop bar member 108

embedded in its sole steps within the open binding mechanism and positions the second side 112 of the bar member 108 into the engaged position below heads 96, 98 and below engagement plate 90 as illustrated in Figures 2 and 3.

To lock the boot within the binding mechanism the user then pulls upwardly on handle member 26 in the direction indicated by arrow A in Figure 4. This upper movement of handle member 26 causes handle member 26 to rotate in the direction indicated by arrow A and to translate in a direction indicated by arrow C in Figure 4. At the same time, link member 28 pivots about fixed pin 34 in the direction indicated by arrow B, which is opposite to the direction of arrow A. Additionally, simultaneously with the pivoting movements, first plate 14 is slidably moved in the direction indicated by arrow C from the open position as illustrated in Figure 3 to the closed position as illustrated in Figure 4. As can be seen in Figures 3 and 4, as handle member 26 is pivoted in the upward position, pivot pin 30 slides in the direction indicated by arrow C. When pin 32 passes over an imaginary line extending between pins 30, 34, the handle reaches what is known as a centered position. In this centered position the handle is instable and the handle will then tend to snap into the closed position as illustrated in Figure 4. In the closed position, the handle is in what is known as an over-centered position. The first set of engagement rods 36, 38 are moved from the open position as illustrated in Figure 3 to the closed position as illustrated in Figure 4, such that the heads 64, 66 and the engagement plate 68 selectively engage and lock the first side 110 of the bar member 108 in the boot binding mechanism. If desired, a conventional latch (not shown) may be placed onto handle member 26 to further prevent an inadvertent pivoting of the handle member. However, in most cases the pressure applied from the boot and the base member will be sufficient to maintain the handle in the stable, over-centered position illustrated in Figure 4.

To unlock the boot, the user simply pushes down and rotates handle member 26 in the direction indicated by arrow B in Figures 3. Because of the linkage mechanism, this movement will cause handle member 26 to rotate in the direction indicated by arrow B and to translate in the direction indicated by arrow D. Thus, because of the link between the first plate 14 and the handle member 26, the second plate 14 is slidably moved in the direction indicated by arrow D to the open position as illustrated in Figure 3. The user can now simply step out of the boot binding mechanism.

Having described the presently preferred exemplary embodiment of a new and improved snowboard boot binding mechanism, in accordance with the present invention, it is believed that

other modifications, variations and changes will be suggested to those skilled in the art in view of the teachings set forth below. It is, therefore, to be understood that all such variations, modifications, and changes are believed to fall within the scope of the present invention as defined by the appended claims.

CLAIMS

1. An apparatus including a snowboard boot binding, comprising:
 - a base adapted to receive a snowboard boot;
 - a first engagement member movably mounted to the base, the first engagement member
 - 5 being adapted to engage a first side of the snowboard boot when the binding is in a closed configuration;
 - a second engagement member mounted to the base, the second engagement member being adapted to engage a second side of the snowboard boot opposite the first side when the binding is in the closed configuration; and
 - 10 a handle mechanically coupled to the first engagement member so that actuation of the handle in a first direction moves the first engagement member toward the second engagement member to move the binding into the closed configuration, the binding being constructed and arranged so that compression forces generated by the snowboard boot on the binding tend to actuate the handle in the first direction.
 - 15
2. The apparatus of claim 1, wherein the handle is mechanically coupled to the first engagement member so that actuation of the handle upwardly away from the base slides the first engagement member toward the second engagement member to place the binding into the closed configuration.
- 20
3. An apparatus including, in combination, a snowboard boot and binding, wherein the binding includes at least one engagement member adapted to engage the snowboard boot, and wherein the snowboard boot includes at least one recess adapted to receive the at least one engagement member.
- 25
4. An apparatus including a snowboard boot binding, comprising:
 - a base adapted to receive a snowboard boot;
 - a first engagement member movably mounted to the base, the first engagement member being adapted to engage a first side of the snowboard boot when the binding is in a closed
 - 30 configuration;
 - a second engagement member mounted to the base, the second engagement member being adapted to engage a second side of the snowboard boot opposite the first side when the

binding is in the closed configuration; and

a handle supported by the base and mechanically coupled to the first engagement member so that actuation of the handle upwardly away from the base moves the first engagement member toward the second engagement member to place the binding into the closed configuration.

5

5. The apparatus of any of claims 1-2 and 4, wherein the first engagement member is slidably mounted to the base, and wherein actuation of the handle upwardly slides the first engagement member toward the second engagement member.

10 6. The apparatus of any of claims 1-2 and 4-5, in combination with a snowboard boot that includes at least one recess adapted to receive the at least one engagement member.

7. The apparatus of any of claims 1-2 and 4-6, wherein the handle is pivotally connected to the first engagement member, and wherein the snowboard boot binding further includes a link
15 pivotally connected to the handle, the link being further pivotally connected to the base.

8. The apparatus of claim 7, wherein the binding has open and closed configurations, and wherein:

the handle is pivotally connected to the first plate at a first pivot point;
20 the link is pivotally connected to the handle at a second pivot point;
the link is pivotally connected to the base at a third pivot point;
the binding has a locking axis that passes through the second and third pivot points; and
the first pivot point is positioned above the locking axis when the binding is in the closed configuration.

25

9. The apparatus of any of claims 1-8, wherein each engagement member includes a pair of engagement surfaces including first and second spaced apart engagement surfaces adapted to separately engage first and second sections of the snowboard boot while not engaging a third section of the snowboard boot disposed therebetween.


30

10. The apparatus of any of claims 1-8, wherein at least one engagement member includes a pair of engagement surfaces including first and second spaced apart engagement surfaces adapted

to separately engage first and second sections of the snowboard boot while not engaging a third section of the snowboard boot disposed therebetween.

11. The apparatus of claim 3, wherein the at least one recess includes first and second
5 recesses separated by a non-recessed section of the snowboard boot, and wherein the at least one engagement member includes a pair of engagement surfaces including first and second spaced apart engagement surfaces adapted to separately engage the first and second recesses.

Fig. 1

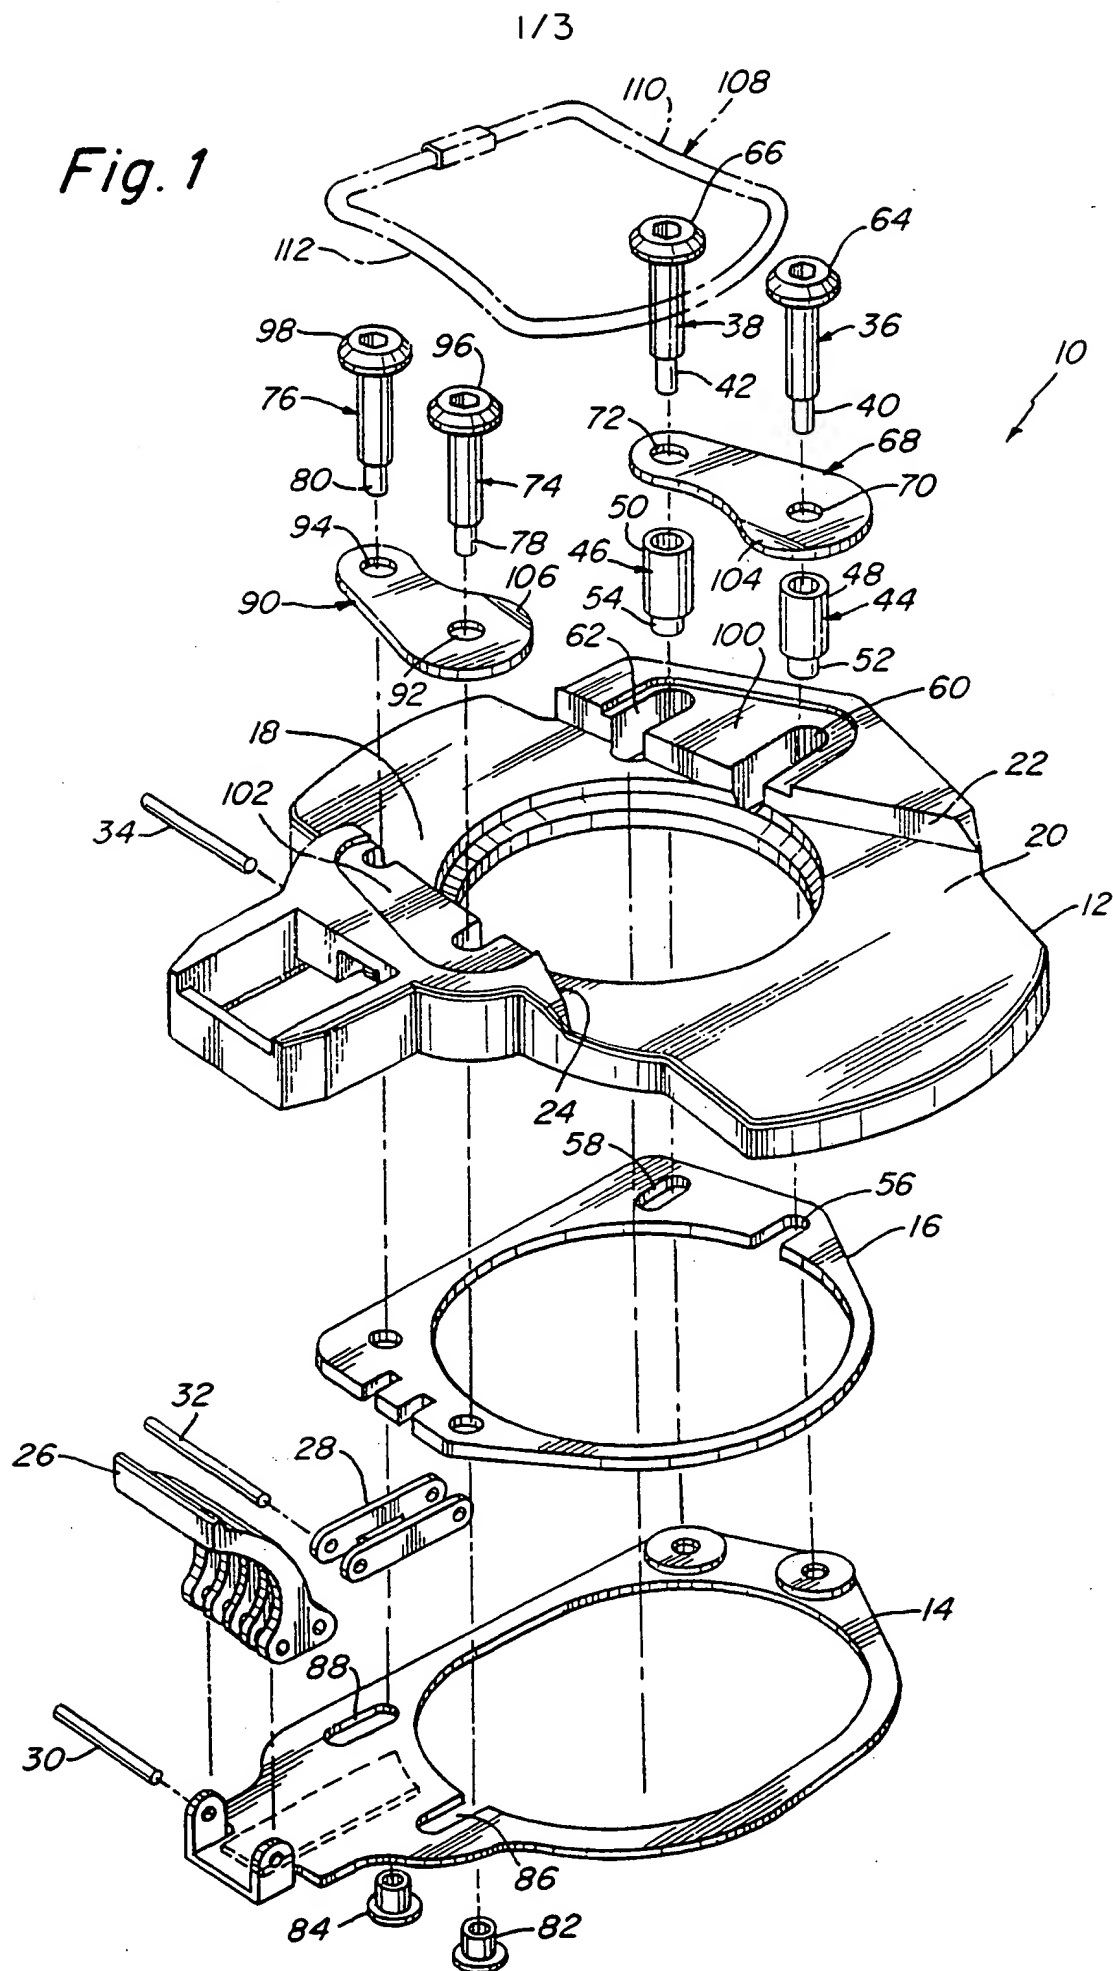

2/3

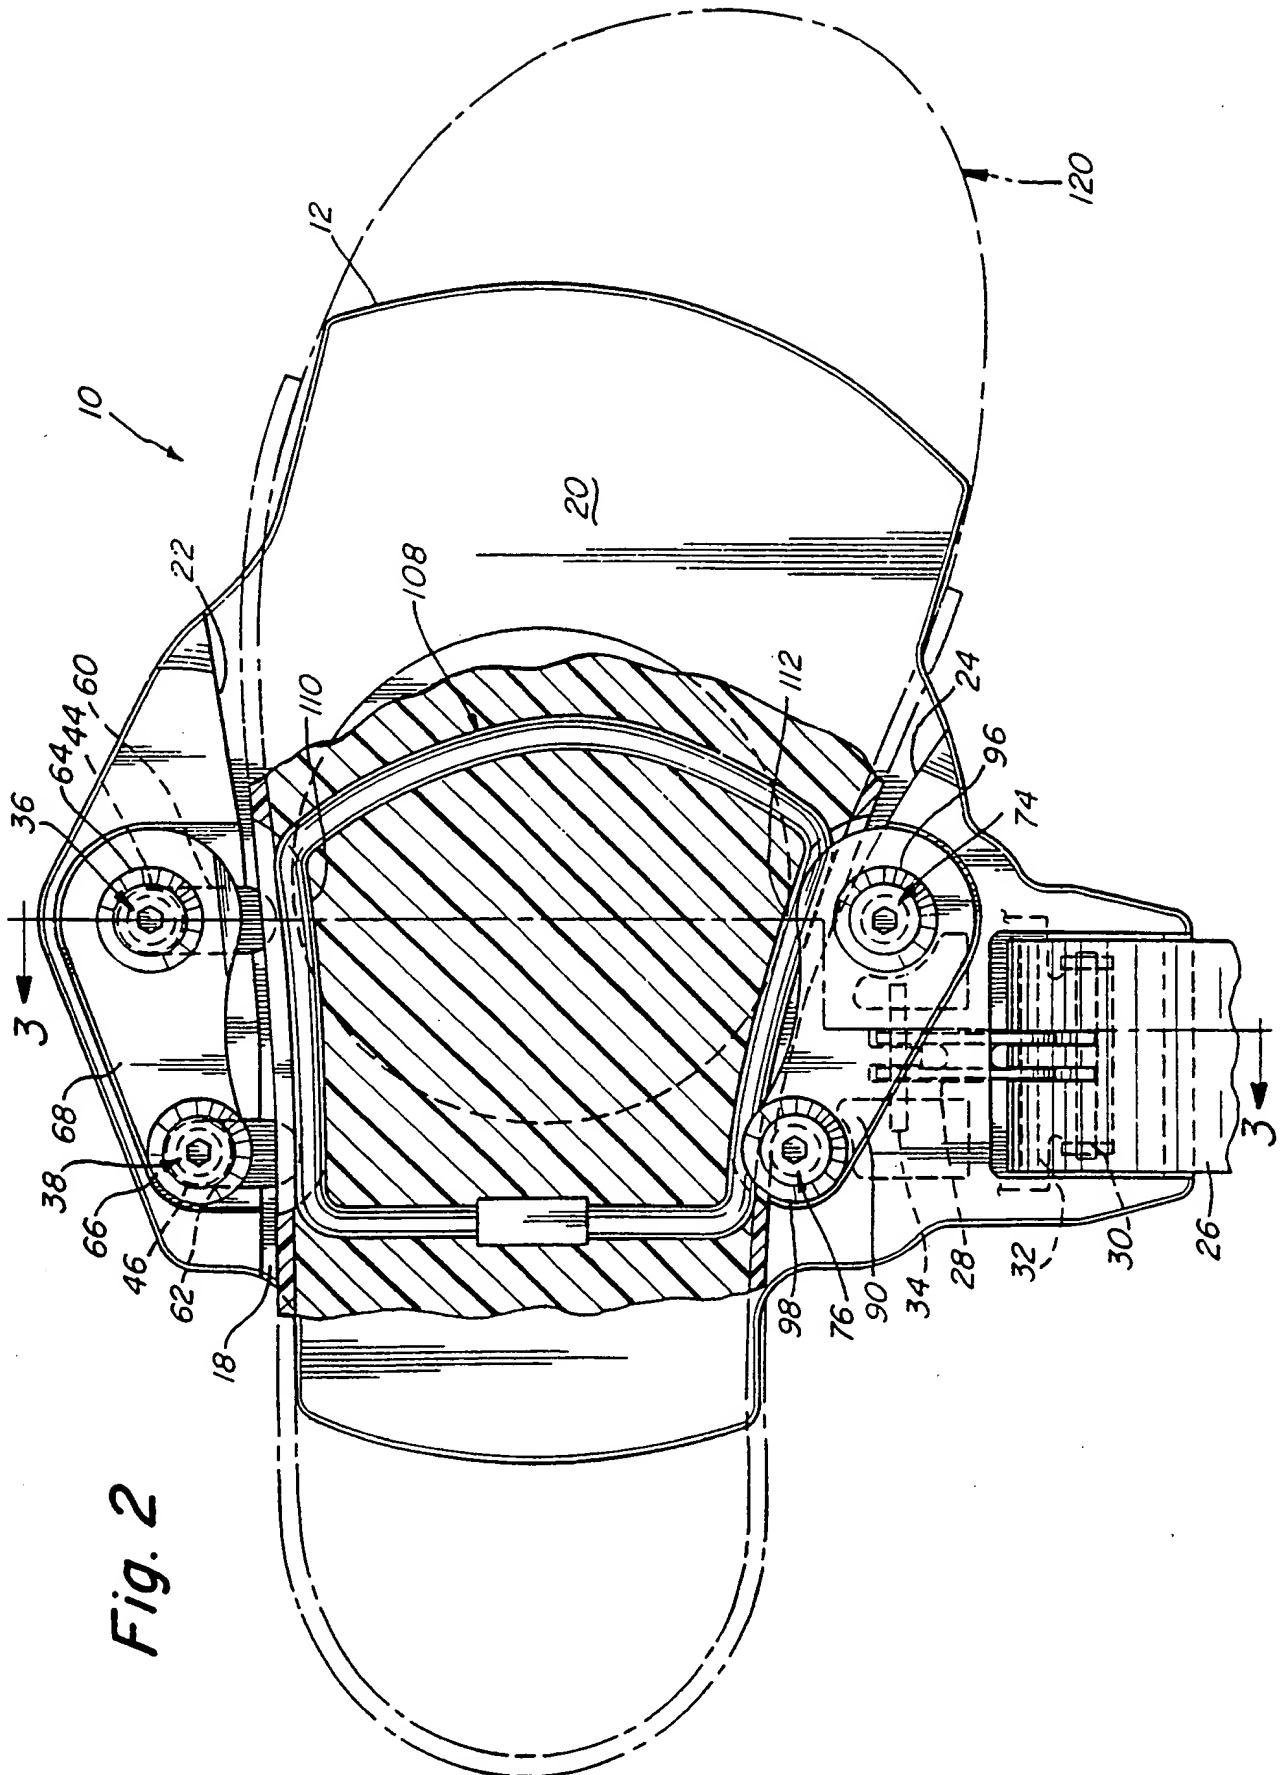


Fig. 3


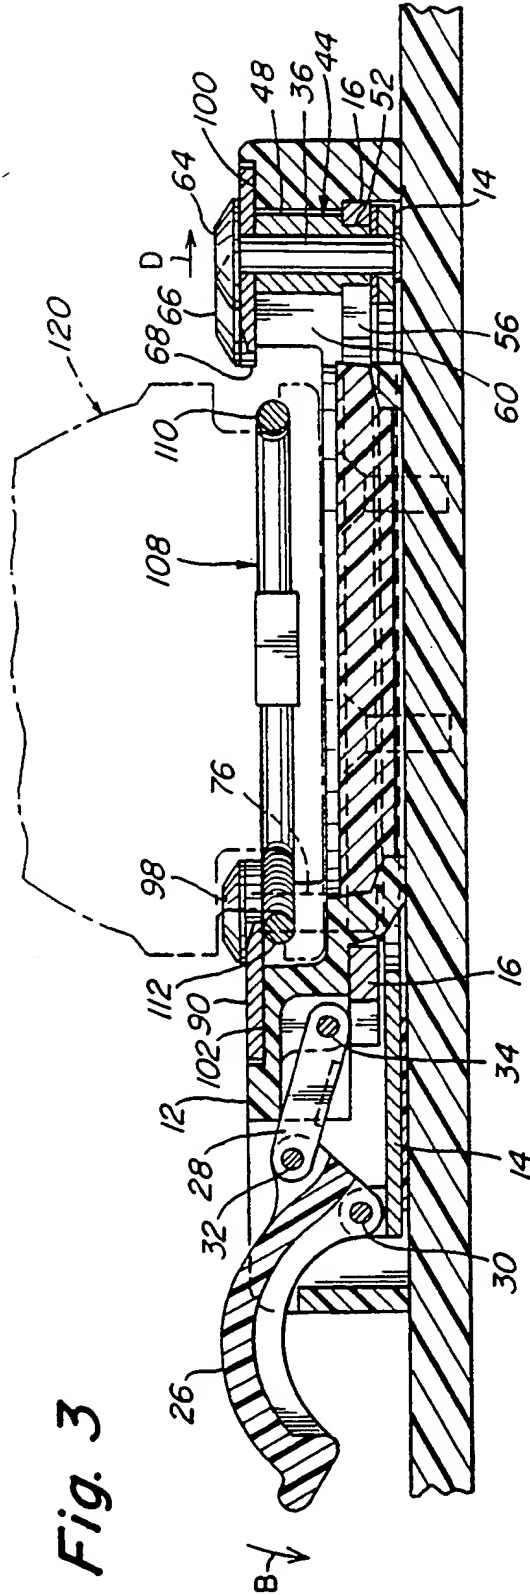


Fig. 4

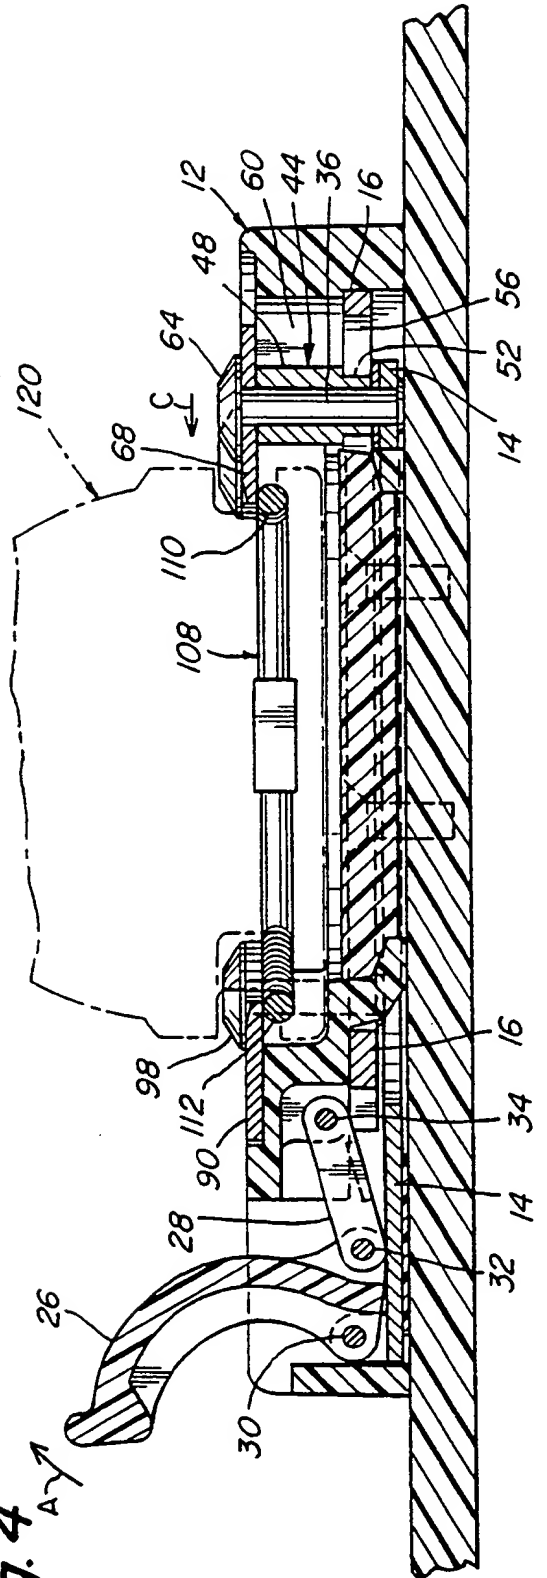

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 96/01068

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 A63C9/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A63C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US,A,5 299 823 (GLASER) 5 April 1994 see column 8, paragraph 7 - column 9, paragraph 1; figures 3-12 ---	1,4,5 2,3,6-11
X A	FR,A,2 148 501 (BETSCHART) 23 March 1973 see page 4, paragraph 1; figures 1-3,6 ---	1,4 2,3,5-8
A	DE,U,94 13 356 (TECHNO CIRCLE GMBH) 1 December 1994 see figures 2-4 -----	1,4

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- * "A" document defining the general state of the art which is not considered to be of particular relevance
- * "E" earlier document but published on or after the international filing date
- * "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- * "O" document referring to an oral disclosure, use, exhibition or other means
- * "P" document published prior to the international filing date but later than the priority date claimed

- * "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- * "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- * "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- * "&" document member of the same patent family

Date of the actual completion of the international search

2 July 1996

Date of mailing of the international search report

17. 07. 96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+ 31-70) 340-3016

Authorized officer

Steegman, R

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 96/01068

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-5299823	05-04-94	AU-B- 6764894 WO-A- 9416784	15-08-94 04-08-94
FR-A-2148501	23-03-73	US-A- 3870327 CH-A- 542633 DE-A- 2225564 US-A- 3779570	11-03-75 30-11-73 22-02-73 18-12-73
DE-U-9413356	01-12-94	NONE	

WOLF, GREENFIELD & SACKS, P.C.
Attn. GIUNTA, R.
600 Atlantic Avenue
Boston, Massachusetts 02210
UNITED STATES OF AMERICA

Date: 21/08/1998